



HOSHIZAKI






The beginning


THE HOSHIZAKI ELECTRIC COMPANY WAS FOUNDED BY **MR SHIGETOSHI SAKAMOTO** WHO DEMONSTRATED REMARKABLE FORESIGHT WHEN HE STARTED OUR COMPANY IN **NAGOYA**, JAPAN IN **1947**.

Mr Shigetoshi Sakamoto

DOMESTIC OPERATION

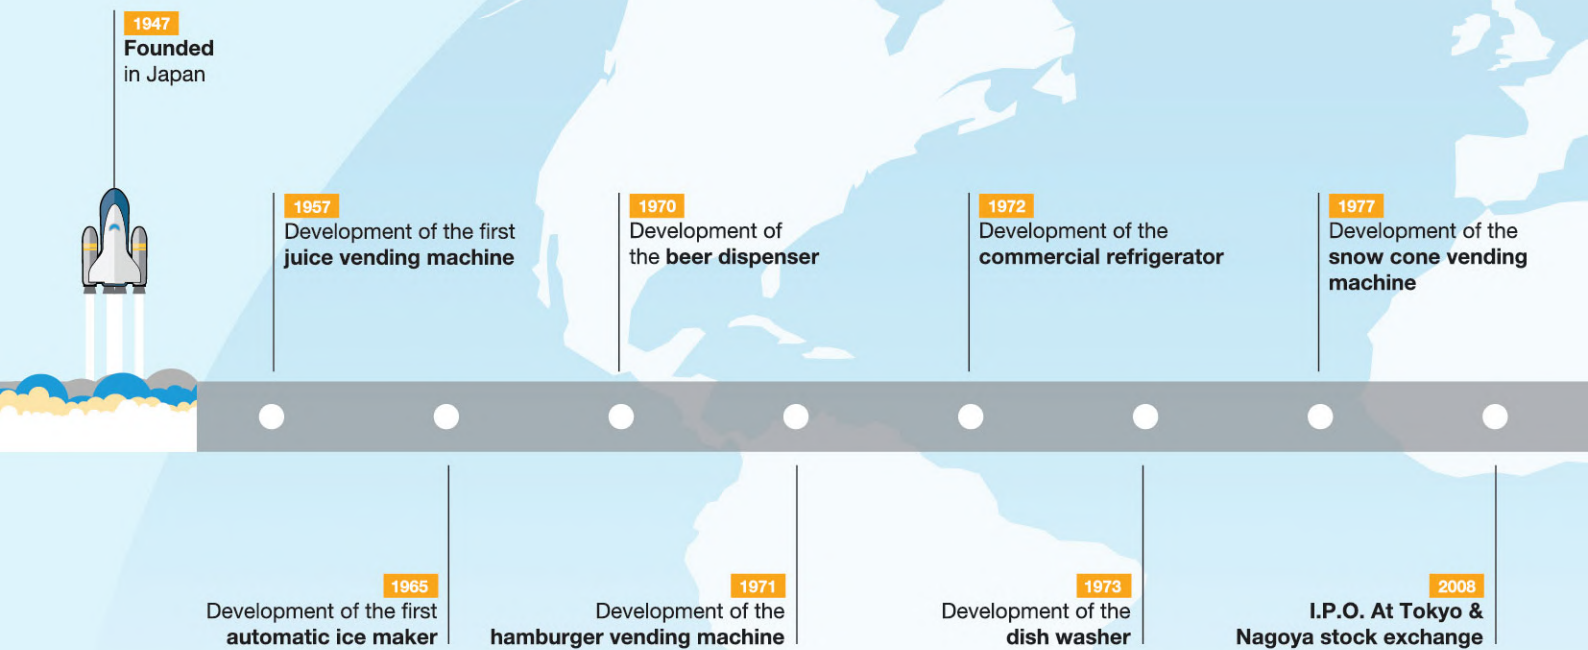

OVERSEAS EXPANSION

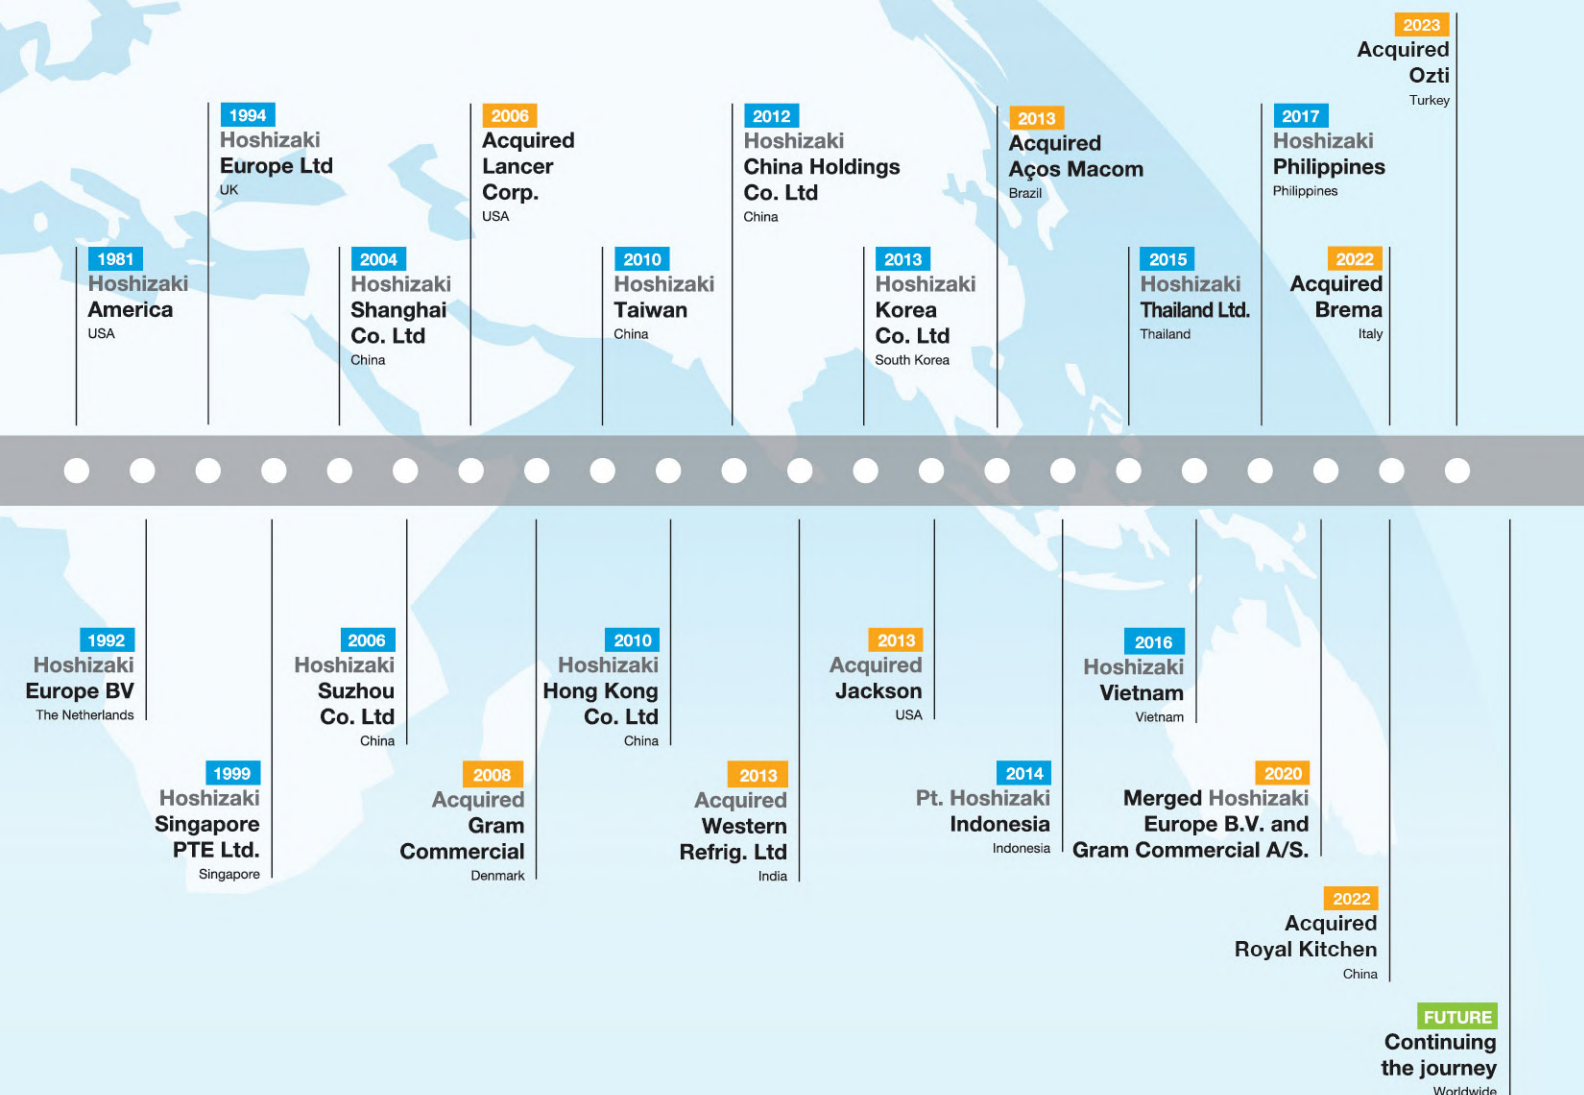



GOLDLINE


PREMIUM SERIES

GOLDLINE SERIES is designed for those who seek for excellence and professions. Full series is in high cooling performance and particularly durable. It allows wide temperature setting range from -6°C to +12°C and -25°C to -7°C. It is accurately controlled within $\pm 2^{\circ}\text{C}$ variant of the setpoint.


KEY FEATURES



Stainless Steel: SUS304 No.4
Front Panel, Front Doors, Top Panel (Undercounter)

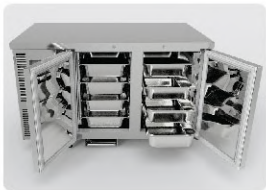

Compact Fan Motor Unit
Larger storage capacity

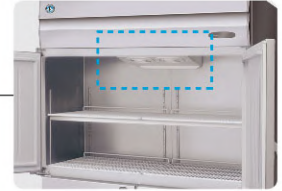

Accommodate 1/1 and 2/1 GN pan




Durable Evaporator (Non-corrosive coating treatment)



Auto-close within 45°
Automatically Door-closing design with 700,000 tests.



Digital Display

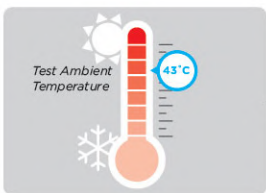

Strong Refrigeration
Designed to operate in tropicalised 43°C ambient conditions.




Hygienic Design
Dished stainless interior and base with rounded edges for easy cleaning.



Front-in & Front-out air flow
No need to leave space on the back.



Easy Cleaning
Removable door gaskets for easy cleaning without tools.

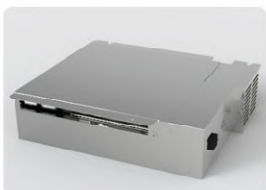

Drain Pan
Standard easy install drain pan for upright models & built-in drain pan for undercounter models.



Easy Service
A compact slide-out refrigeration unit for easy maintenance and service access.



Warranty
2 years parts & labour

Parts & Labour





STANDARD SERIES

R Refrigerator temperature range: -6°C ~ +12°C

F Freezer temperature range: -25°C ~ -7°C

UPRIGHT 800mm depth

CN



Model	R HRE-67 / 77B-SHD F HFE-67 / 77B-SHD	Dual Temperature HRFE-77B-SHD	R HRE-127B-SHD F HFE-127B-SHD	R HRE-147B-SHD F HFE-147B-SHD	R HRE-187B-SHD F HFE-187B-SHD
Storage Capacity	R: 507L F: 599L	R: 299L F: 243L	R: 1109L F: 1102L	R: 1311L F: 1304L	R: 1702L F: 1713L
Electric Consumption	R: 317/348W F: 348/572W	439W	R: 501W F: 723W	R: 501W F: 723W	R: 501W F: 723W
Dim WxDx(H+Leg) mm	625/700 x 800 x (1900 + 100)	700 x 800 x (1900 + 100)	1200 x 800 x (1900 + 100)	1400 x 800 x (1900 + 100)	1800 x 800 x (1900 + 100)
Shelf	4pcs	4pcs	8pcs	8pcs	12pcs

UNDERCOUNTER 750mm depth

CN



Model	R RTC-90SDA F FTC-90SDA	R RTC-120SDA F FTC-120SDA	R RTC-150SDA F FTC-150SDA	R RTC-180SDA F FTC-180SDA
Storage Capacity	190L	301L	413L	524L
Electric Consumption	R: 175W F: 349W	R: 198W F: 408W	R: 271W F: 5439W	R: 314W F: 582W
Dim WxDx(H+Leg) mm	900 x 750 x (700 + 100/150)	1200 x 750 x (700 + 100/150)	1400 x 750 x (700 + 100/150)	1800 x 750 x (700 + 100/150)
Shelf	2pcs	4pcs	4pcs	6pcs

600mm depth

Model	R RTC-90SNA F FTC-90SNA	R RTC-120SNA F FTC-120SNA	R RTC-150SNA F FTC-150SNA	R RTC-180SNA F FTC-180SNA
Storage Capacity	143L	228L	313L	401L
Electric Consumption	R: 174W F: 349W	R: 198W F: 408W	R: 271W F: 5439W	R: 314W F: 582W
Dim. WxDx(H+Leg) mm	900 x 600 x (700 + 100/150)	1200 x 600 x (700 + 100/150)	1400 x 600 x (700 + 100/150)	1800 x 600 x (700 + 100/150)
Shelf	2pcs	4pcs	4pcs	6pcs

* Power Supply: 1 Phase / 220V / 50Hz

* Operation Conditions: Test Ambient Temperature 5~43°C

5 * 150mm adjustable leg / Castor is available

GN SERIES

R Refrigerator temperature range: -6°C ~ +12°C

F Freezer temperature range: -25°C ~ -7°C

UPRIGHT 850mm depth

CN




R HRE-70B-SHD-GN

R HRE-140B-SHD-GN

F HFE-70B-SHD-GN

F HFE-140B-SHD-GN

Model		
Storage Capacity	R: 630L F: 630L	R: 1370L F: 1360L
Electric Consumption	R: 443W F: 572W	R: 469W F: 696W
Dim WxDx(H+Leg) mm	700 x 850 x (1900 + 100)	1400 x 850 x (1900 + 100)
GN Pan	2/1 GN Size x 8	2/1 GN Size x 16



* Accommodate 2/1 GN Pan

UNDERCOUNTER 750mm depth

CN




R RTC-90SDA-GN

R RTC-125SDA-GN

F FTC-90SDA-GN

F FTC-125SDA-GN

Model		
Storage Capacity	182L	301L
Electric Consumption	R: 215W F: 398W	R: 315W F: 560W
Dim WxDx(H+Leg) mm	900 x 750 x (700 + 100/150)	1250 x 750 x (700 + 100/150)
GN Pan	1/1 GN Size x 2	1/1 GN Size x 4



* Accommodate 1/1 GN Pan

DRAWER 750mm depth

CN



R RTC-90DDA-GN-2D/3D

R RTC-125DDA-GN-4D/6D

R RTC-167DDA-GN-6D/9D

F FTC-90DDA-GN-2D/3D

F FTC-125DDA-GN-4D/6D

F FTC-167DDA-GN-6D/9D

Model			
Storage Capacity	176L	296L	443L
Electric Consumption	R: 243W F: 395W	R: 315W F: 560W	R: 315W F: 619W
Dim WxDx(H+Leg) mm	900 x 750 x (700 + 100/150)	1250 x 750 x (700 + 100/150)	1670 x 750 x (700 + 100/150)
Drawers	2 or 3 drawers	4 or 6 drawers	6 or 9 drawers



A-FIT


BASIC SERIES

A-FIT SERIES is designed for those who seek for the basics. Simple outlook design yet with uncompromising cooling technologies. The series can provide all-round efficiency and cost-effective value in the market.


KEY FEATURES

IoT

RS485 IoT port built for monitoring equipment condition via PC & app
Collected data can be upload directly into customer database/server

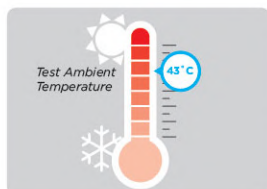**Strong Refrigeration**


Designed to operation in tropicalised
43°C Ambient conditions.

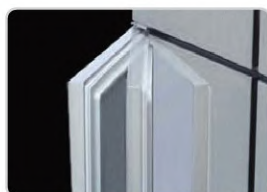**Auto-close within 45°**

Automatically Door-closing
design with 700,000 tests.

**Drain Heater**


Standard easy install drain pan for
upright models & built-in for
undercounter models.

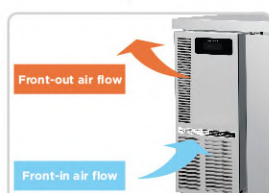**Compact Refrigeration Unit****Front-in & Front-out air flow**


No need to leave space on
the back.

**Easy Cleaning**

Removable door gaskets for
easy cleaning without tools.

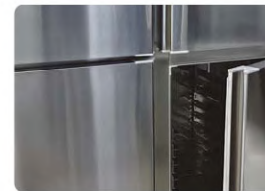**Built-in Stainless Steel Handle****Hygienic Design**

Dished stainless interior
and base with rounded
edged for easy cleaning.

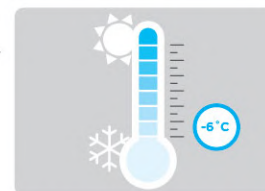**Better Cooling Capability**

-6°C refrigerator &
-23°C freezer.

**Digital Display****Warranty**

2 years parts & labour

Parts & Labour



STANDARD SERIES

R Refrigerator temperature range: -6 ~ +12°C * -2 ~ +12°C

F Freezer temperature range: -23 ~ -7°C

UPRIGHT 800mm depth

CN



R HR-78MA-S
F HF-78MA-S



R HR-128MA-S
F HF-128MA-S



R HR-148MA-S
F HF-148MA-S



R HR-188MA-S
F HF-188MA-S

Model				
Storage Capacity	569L	R: 1053L F: 1047L	R: 1243L F: 1233L	R: 1632L F: 1622L
Electric Consumption	R: 386W F: 469W	R: 415W F: 700W	R: 412W F: 740W	R: 433W F: 917W
Dim WxDx(H+Leg) mm	700 x 800 x (1900 + 100)	1200 x 800 x (1900 + 100)	1400 x 800 x (1900 + 100)	1800 x 800 x (1900 + 100)
Shelf	4pcs	8pcs	8pcs	12pcs

650mm depth

CN

R HR-76MA-S*
F HF-76MA-S

R HR-126MA-S*
F HF-126MA-S

R HR-146MA-S*
F HF-146MA-S

Storage Capacity	467L	R: 866L F: 856L	R: 1021L F: 1011L
Electric Consumption	R: 237W F: 426W	R: 343W F: 696W	R: 4343W F: 696W
Dim WxDx(H+Leg) mm	700 x 650 x (1900 + 100)	1200 x 650 x (1900 + 100)	1400 x 650 x (1900 + 100)
Shelf	4pcs	8pcs	8pcs

* Pre-order required customized model

UNDERCOUNTER 750mm depth

CN



R RT-98MA-S
F FT-98MA-S



R RT-128MA-S
F FT-128MA-S



R RT-158MA-S
F FT-158MA-S



R RT-188MA-S
F FT-188MA-S

Storage Capacity	199L	307L	420L	502L
Electric Consumption	R: 240W F: 420W	R: 245W F: 418W	R: 260W F: 415W	R: 280W F: 400W
Dim WxDx(H+Leg) mm	900 x 750 x (700 + 100/150)	1200 x 750 x (700 + 100/150)	1500 x 750 x (700 + 100/150)	1800 x 750 x (700 + 100/150)
Shelf	2pcs	4pcs	4pcs	6pcs

600mm depth

R RT-96MA-S
F FT-96MA-S

R RT-126MA-S
F FT-126MA-S

R RT-156MA-S
F FT-156MA-S

R RT-186MA-S
F FT-186MA-S

Storage Capacity	151L	231L	318L	401L
Electric Consumption	R: 240W F: 415W	R: 245W F: 410W	R: 260W F: 415W	R: 280W F: 400W
Dim WxDx(H+Leg) mm	900 x 600 x (700 + 100/150)	1200 x 600 x (700 + 100/150)	1500 x 600 x (700 + 100/150)	1800 x 600 x (700 + 100/150)
Shelf	2pcs	4pcs	4pcs	6pcs

* Power Supply: 1 Phase / 220-240V / 50Hz

* Operation Conditions: Test Ambient Temperature 5~43°C

* 150mm adjustable leg / castor is available

STANDARD SERIES

R Refrigerator temperature range: -6 ~ +12°C * -2 ~ +12°C **F** Freezer temperature range: -23 ~ -7°C * -23 ~ -11°C

UPRIGHT

DUAL TEMPERATURE
800mm depthCN 

Model	HRF-78MB-S*	HRF-128MA-S	HRF-148MA-S	HRF-188MA-S
Storage Capacity	R: 260L F: 280L	R: 431L F: 431L	R: 527L F: 527L	R: 980L F: 472L
Electric Consumption	478W	727W	808W	844W
Dim WxDx(H+Leg) mm	700 x 800 x (1900 + 100)	1200 x 800 x (1900 + 100)	1400 x 800 x (1900 + 100)	1800 x 800 x (1900 + 100)
Shelf	4pcs	8pcs	8pcs	12pcs

UNDERCOUNTER

SLIDING GLASS DOOR
750mm depth

CN



Model	R RT-128MA-SSG*	R RT-158MA-SSG*	R RT-188MA-SSG*
Storage Capacity	307L	420L	502L
Electric Consumption	295W	315W	315W
Dim WxDx(H+Leg) mm	1200 x 750 x (700 + 100/150)	1500 x 750 x (700 + 100/150)	1800 x 750 x (700 + 100/150)
Shelf	4pcs	4pcs	6pcs

600mm depth

CN

Model	R RT-126MA-SSG*	R RT-156MA-SSG*	R RT-186MA-SSG*
Storage Capacity	231L	318L	401L
Electric Consumption	295W	315W	315W
Dim WxDx(H+Leg) mm	1200 x 600 x (700 + 100/150)	1500 x 600 x (700 + 100/150)	1800 x 600 x (700 + 100/150)
Shelf	4pcs	4pcs	6pcs

STANDARD SERIES

R Refrigerator temperature range: -6 ~ +12°C * -2 ~ +12°C

F Freezer temperature range: -23 ~ -7°C

* Accommodate 1/1 GN Pan



LOW UNDERCOUNTER

DRAWER 750mm depth

CN



R RTL-108MA-SD

F FTL-108MA-SD

R RTL-148MA-SD

F FTL-148MA-SD

R RTL-188MA-SD

F FTL-188MA-SD

Model			
Storage Capacity	85L	176L	267L
Electric Consumption	R: 304W F: 376W	R: 324W F: 476W	R: 257W F: 418W
Dim WxDx(H+Leg) mm	980 x 750 x (470 + 100/150)	1400 x 750 x (470 + 100/150)	1820 x 750 x (470 + 100/150)
Drawers	2 drawers	4 drawers	6 drawers

DOOR + DRAWER 750mm depth

CN



R RT-128MA-S-3D

F FT-128MA-S-3D

R RT-158MA-S-3D

F FT-158MA-S-3D

R RT-188MA-S-3D

F FT-188MA-S-3D

Model			
Storage Capacity	307L	420L	502L
Electric Consumption	R: 245W F: 354W	R: 324W F: 476W	R: 257W F: 418W
Dim WxDx(H+Leg) mm	1200 x 750 x (700 + 100/150)	1500 x 750 x (700 + 100/150)	1800 x 750 x (700 + 100/150)

600mm depth

CN

R RT-126MA-S-3D

F FT-126MA-S-3D

R RT-156MA-S-3D

F FT-156MA-S-3D

R RT-186MA-S-3D

F FT-186MA-S-3D

Model			
Storage Capacity	231L	318L	401L
Electric Consumption	R: 245W F: 354W	R: 245W F: 333W	R: 245W F: 357W
Dim WxDx(H+Leg) mm	1200 x 600 x (700 + 100/150)	1500 x 600 x (700 + 100/150)	1800 x 600 x (700 + 100/150)

* Power Supply: 1 Phase / 220-240V / 50Hz

* Operation Conditions: Test Ambient Temperature 5~43°C

* 150mm adjustable leg / castor is available



IoT For Commercial Refrigeration Benefits:

• **Real-Time Monitoring.** Integrated IoT sensors allow users to monitor conditions such as internal temperature, and more. This provides users with detailed data about their refrigeration systems and usage patterns, leading to actionable insights into operations and power consumption. Real-time monitoring also enables managers to remotely assess conditions and manage their system from their phone or computer 24/7. Users can even set alerts for when the system reaches certain temperature or error thresholds and receive immediate notifications on the mobile device.

• **Maintenance and Diagnostics.** IoT technology provides insights that allow managers to schedule maintenance on their units when required as well as foresee issues before there is a problem. It also provides technicians with the capability to diagnose equipment remotely and the increased diagnostic functionality to pinpoint the problem precisely. The result is less onsite service calls, thus resulting in reduced maintenance and repair costs and less downtime.


• **Increased Efficiency.** The IoT network is able to use data from sensors to analyze real-world conditions and make adjustments in real-time. That means refrigeration units work at full capacity when necessary and enter a lower power consumption state when less cooling is required. With intelligent commercial refrigeration monitoring, practices like fly wheeling become lower risk. This increases efficiency, reduces costs, and leads to longer equipment life.

Application for IoT

In Hoshizaki A-FIT Series, RS485 IoT port has been added inside the fridge which able for customers in different industries to connect their IoT system for monitoring equipment condition via PC & app.

Applications			
Restaurant	Fast-food chain	Tea Store	Coffee Store
Cold-chain (logistics, Warehouse)	Hospital	Convenience Store	Hotel

- ✓ **Collect Temperature Data**
 - food safety monitoring
- ✓ **Collect Error Code Data**
 - automatically notify 3rd party maintenance company
- ✓ **Data Collection and Backup**
 - data can be backed up in system vender's server for security reason

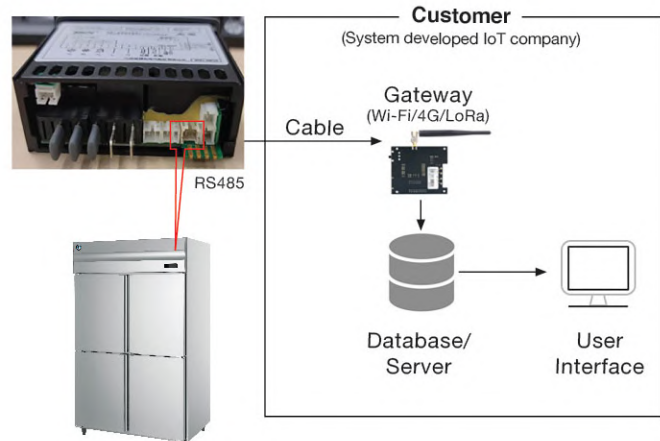

JAPAN MADE FRIDGE

R Refrigerator temperature range: 2 ~ +12°C

※ Transformer is required with 1 year warranty

DOOR COUNTER

SLIDING GLASS DOOR 450mm depth

JP





Model	RTS-90STD	RTS-100STD	RTS-120STD
Storage Capacity	128L	149L	190L
Electric Consumption	139W	139W	139W
Power Supply	1/100V 50/60Hz	1/100V 50/60Hz	1/100V 50/60Hz
Dim WxDx(H+Leg) mm	900 x 450 x (700 + 100)	1000 x 450 x (700 + 100)	1200 x 450 x (700 + 100)

R Refrigerator temperature range: -6 ~ +12°C

F Freezer temperature range: Below -25 ~ -7°C

DUAL TEMPERATURE COUNTER

JP

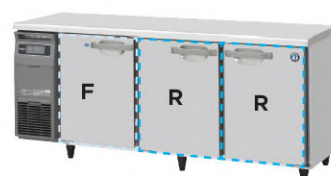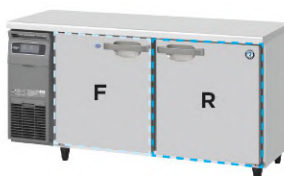

Model	RFT-120SNG-1 RFT-120SDG-1	RFT-150SNG-1 RFT-150SDG-1	RFT-180SNG-1 RFT-180SDG-1
Storage Capacity	R: 106L F: 114L R: 139L F: 151L	R: 151L F: 159L R: 197L F: 209L	R: 252L F: 144L R: 330L F: 151L
Electric Consumption	498W 498W	502W 502W	498W 498W
Power Supply	1/100V 50/60Hz	1/100V 50/60Hz	1/100V 50/60Hz
Dim WxDx(H+Leg) mm	1200 x 600 x (700 + 100) 1200 x 750 x (700 + 100)	1500 x 600 x (700 + 100) 1500 x 750 x (700 + 100)	1800 x 600 x (700 + 100) 1800 x 750 x (700 + 100)

FISH SINK UNDERCOUNTER REFRIGERATOR

JP



Model	RW-120SNCG-ML	RW-150SNCG-ML	RW-180SNCG-ML
Storage Capacity	138L	196L	253L
Electric Consumption	194W	209W	223W
Power Supply	1/100V 50/60Hz	1/100V 50/60Hz	1/100V 50/60Hz
Dim WxDx(H+Leg) mm	1200 x 600 x (700 + 100)	1500 x 600 x (700 + 100)	1800 x 600 x (700 + 100)

* Power Supply: 1 Phase / 100V / 50/60Hz

* Operation Conditions: Test Ambient Temperature 5~30°C for sliding glass door / 5~35°C for dual temperature & fish display

CUSTOMIZATION

Make It Your Own:

Our extensive refrigeration line can be customized with a variety of cosmetic and functional options. Just let us know your customized requirements, Hoshizaki gives you the choice of creating the perfect unit for all of your needs. Here please find some popular customization options as reference.



Half Glass Door



Long Glass Door (SLG)



Pillarless (ML)



Swing Glass Door (SG)



GN



Pillarless (ML)



Table Top Opening



Back Splash



LED Light

CUSTOMIZATION	Goldline : Upright	A-Fit : Upright	Goldline : Undercounter	A-Fit : Undercounter
LED LIGHT	✓	✓	✓	✓
BACK SPLASH	—	—	✓	✓
GN / SHEET PAN	✓	✓	✓	✓
PILLARLESS (ML)	Refrigerator	Refrigerator	Refrigerator	Refrigerator
PASS THROUGH	✓	✓	✓	✓
SWING GLASS DOOR (SG)	Refrigerator	Refrigerator	Refrigerator	Refrigerator
RIGHT SIDE COMPRESSOR (R)	—	—	✓	✓
TABLE TOP OPENING / EXTENSION	—	—	✓	✓
LONG GLASS DOOR (SLG)	—	Refrigerator HR-76MA-S / HR-78MA-S HR-126MA-S / HR-128MA-S	—	—



HOSHIZAKI

HOSHIZAKI HONG KONG CO., LTD.

Showroom and Customer Service Centre
Unit G, 17/F, World Tech Centre,
95 How Ming Street,
Kwun Tong, Kowloon,
Hong Kong

Enquiry Hotline: 2866 2108

Email: info@hoshizaki.com.hk

www.hoshizaki.com.hk

Models and technical specifications may change without notice.

